

KASSER II

M INDUSTRIES

Multirole MRAP Armoured Combat Carrier



KASSER II

GENERAL

- Crew – Driver, Commander, Gunner plus 6 Soldiers
- Gross Vehicle Mass – 17,260 kg
- Tare – 14,760 kg (unladen)
- Payload – 2,500 kg

DIMENSIONS

- Length – 6,740 mm
- Width – 2,500 mm
- Height – 2,760 mm
- Ground Clearance – 560 mm
- Wheel Base – 3,920 mm



KEY CHARACTERISTICS

- Engine – Cummins 8.9 ISL / Euro III
- Power – 298 Kw (400 Hp) @ 2,200 rpm
- Torque – 1,627 Nm @ 1,500 rpm
- Power / Weight – 23
- Max Speed – 110 km/h
- Road Range – 550 km @ 80 km/h
- Transmission – Allison 3200 SP
- Axles – Axle Tech Independent Axles
- Tyres – Michelin 14.00 R20 with RFIs
- Suspension – Coil with Shock Absorbers
- Turning circle – 19.2 m Kerb to Kerb




KASSER II



Integrated defense solutions demand leadership, technical consultation and performance engineering. M4 Industries delivers customer driven solutions based on a unique combination of operational, technical and strategic expertise, coupled with access to very specific end user requirements, allowing M4 Industries to deliver performance reliability and technology integration that make a real difference in extreme and demanding operating conditions.

KASSER II is fully manufactured by M4 Industries

PROTECTION: Ballistic - B7+ - Landmine - Stanag Level 4B

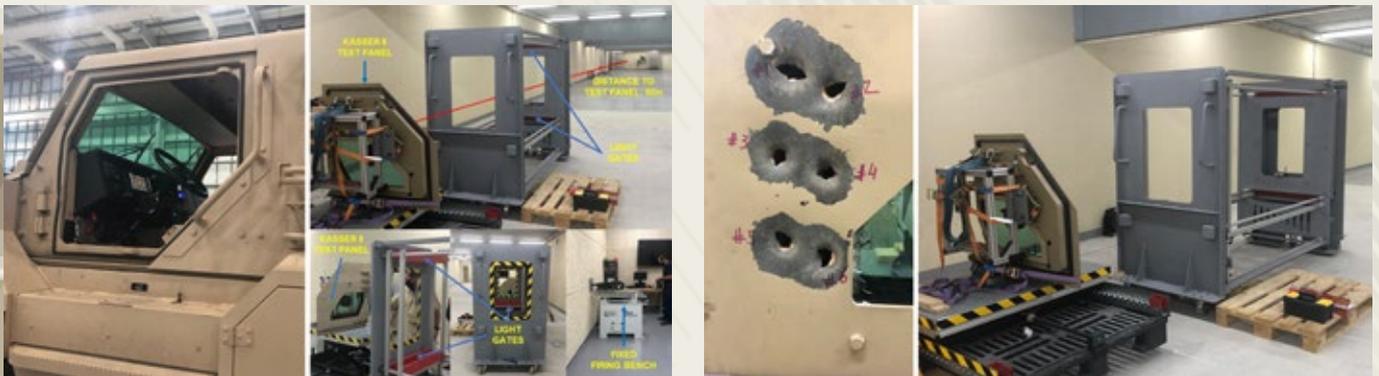

RAAD | 14.5mm RWS



RAAD || 30mm RWS



FeWas 120 (12.7mm) RWS



FeWas 30mm Dual RWS

KASSER II



STANDARD EQUIPMENT

- Central Tyre Inflation System
- Remote Weapon Station Interface
- 11 x Gun Ports - Side and rear window
- 1 x Under Armour Loading Hatch
- 3 x Roof Hatches
- 6 x Antenna Mountings
- Doors - 2 x front; 1 x rear
- Air-Conditioner 51 000 BTU (2 x 25 000 BTU)
- Integrated Fire Suppression System - Engine, Cabin & Wheels
- Storage Space - 1 Bin each side, Gypsy Racks, Fender Bins
- Interior Cabin Lights
- Rear View Camera
- Draw Bar and Towing Interfaces
- Jack and Base Plate, Wheel spanners
- Tyre inflator with hose and tool kit
- Turret - Side Protection Plates Siren and Strobe Lights
- 20 000lb (9 Ton) Winch with Snatch Block
- 12V / 24V Power Socket plus USB Charging Points
- 2 X Auxiliary Batteries
- 4 x Jerry Can
- 220V Power Point

